

## Separador de agua ciclónico con purga de flotador



**Rosca hembra (BSPP)**

G 1/2

**Caudal (m3/h)**

155

**Presión máx de uso**

16 bar

**Temperatura**

+1°C a +65°C

**Material**

Aluminio


**Equipado con**

Purga automática

### Descripción

Referencia	Rosca hembra (BSPP)	Caudal (m3/h)
<b>SPC 155</b>	G 1/2	155

Referencia	Rosca hembra (BSPP)	Caudal (m3/h)
<b>SPC 235</b>	G 3/4	235
<b>SPC 365</b>	G 1	365
<b>SPC 770</b>	G 1 1/2	770
<b>SPC 1280</b>	G 2	1280

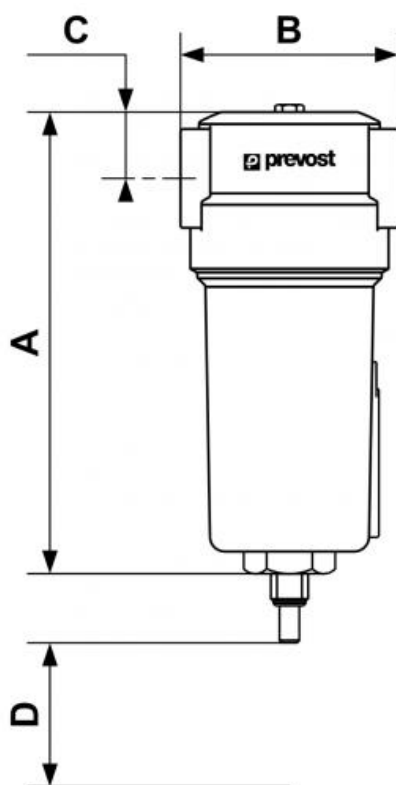

### Dimensions

Referencia	A mm	B mm	C mm	D mm
<b>SPC 155</b>	187	88	20	60
<b>SPC 235</b>	257	88	20	80
<b>SPC 365</b>	263	125	32	100
<b>SPC 770</b>	461	125	32	140
<b>SPC 1280</b>	684	163	43	520