

Serie INOX 304



Ø min./máx. (mm)

08 - 14

Apriete tornillo (Nm)

2,5 - 3,5

Ancho de cinta (mm)

9

Envase (Caja de cartón)

100

Material

Acero inoxidable


Aplicaciones

Ambientes corrosivo

Descripción

Referencia	Ø min./máx. (mm)	Apriete tornillo (Nm)	Ancho de cinta (mm)	Envase (Caja de cartón)
PBI9 814	08 - 14	2,5 - 3,5	9	100
PBI9 1117	11 - 17	2,5 - 3,5	9	100
PBI9 1320	13 - 20	3 - 4	9	100
PBI12 1524	15 - 24	4 - 4,5	12	50
PBI12 1928	19 - 28	4 - 4,5	12	50

Referencia	Ø min./máx. (mm)	Apriete tornillo (Nm)	Ancho de cinta (mm)	Envase (Caja de cartón)
PBI12 2232	22 - 32	4 - 4,5	12	50
PBI12 2638	26 - 38	4 - 4,5	12	25
PBI12 3244	32 - 44	5 - 6	12	25
PBI12 3850	38 - 50	5 - 6	12	25
PBI12 4456	44 - 56	5 - 6	12	25
PBI12 5065	50 - 65	5 - 6	12	25
PBI12 5875	58 - 75	5 - 6	12	25
PBI12 6885	68 - 85	5 - 6	12	10
PBI12 7795	77 - 95	5 - 6	12	10
PBI12 87112	87 - 112	5 - 6	12	10
PBI12 104138	104 - 138	5 - 6	12	10
PBI12 130165	130 - 165	5 - 6	12	10
PBI12 150180	150 - 180	5 - 6	12	10
PBI12 175205	175 - 205	5 - 6	12	10
PBI12 200231	200 - 231	5 - 6	12	10
PBI12 226256	226 - 256	5 - 6	12	10
PBI12 251282	251 - 282		12	10
PBI12 277307	277 - 307		12	10

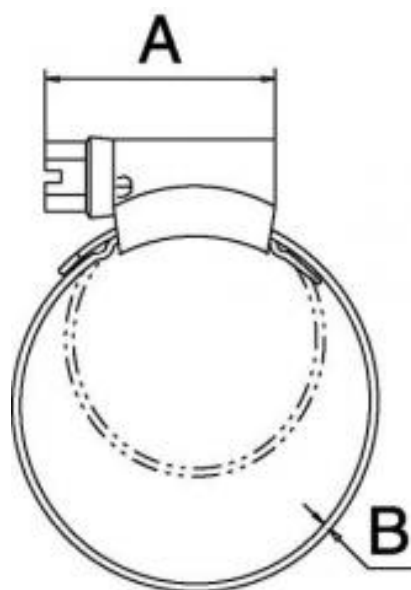

7 mm



Dimensions

Referencia	A mm
PBI9 814	0.787
PBI9 1117	0.787
PBI9 1320	0.787

Referencia	A mm
PBI12 1524	0.866
PBI12 1928	0.906
PBI12 2232	0.984
PBI12 2638	0.984
PBI12 3244	1.142
PBI12 3850	1.142
PBI12 4456	1.142
PBI12 5065	1.26
PBI12 5875	1.26
PBI12 6885	1.26
PBI12 7795	1.26
PBI12 87112	1.26
PBI12 104138	1.26
PBI12 130165	1.26
PBI12 150180	1.26
PBI12 175205	1.26
PBI12 200231	1.26
PBI12 226256	1.26
PBI12 251282	1.26
PBI12 277307	1.26