

## Codo macho 90° cónico - RB5



### Rosca macho BSPT

R 1/8

### Para tubo Ø (mm)

6 x 4

### Presión máx de uso

15 bar

### Temperatura

-20°C a +80°C


### Material

Latón niquelado

## Descripción

| Referencia      | Rosca macho BSPT | Para tubo Ø (mm) |
|-----------------|------------------|------------------|
| <b>RB5 618</b>  | R 1/8            | 6 x 4            |
| <b>RB5 614</b>  | R 1/4            | 6 x 4            |
| <b>RB5 818</b>  | R 1/8            | 8 x 6            |
| <b>RB5 814</b>  | R 1/4            | 8 x 6            |
| <b>RB5 838</b>  | R 3/8            | 8 x 6            |
| <b>RB5 1014</b> | R 1/4            | 10 x 8           |

| Referencia      | Rosca macho BSPT | Para tubo Ø (mm) |
|-----------------|------------------|------------------|
| <b>RB5 1038</b> | R 3/8            | 10 x 8           |
| <b>RB5 1238</b> | R 3/8            | 12 x 10          |

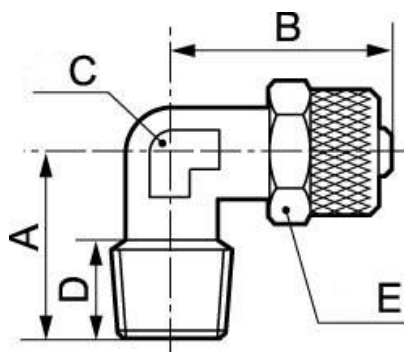

### Dimensions

| Referencia      | A mm | B mm | C mm | D mm | E mm |
|-----------------|------|------|------|------|------|
| <b>RB5 618</b>  | 17   | 22   | 9    | 7    | 12   |
| <b>RB5 614</b>  | 20   | 22   | 9    | 10   | 12   |
| <b>RB5 818</b>  | 18   | 23   | 12   | 8    | 14   |
| <b>RB5 814</b>  | 20   | 22   | 12   | 10   | 14   |
| <b>RB5 838</b>  | 21   | 21   | 9    | 12   | 16   |
| <b>RB5 1014</b> | 20.5 | 25   | 12   | 10   | 16   |
| <b>RB5 1038</b> | 22   | 23   | 11   | 12   | 14   |
| <b>RB5 1238</b> | 24   | 31   | 17   | 12   | 19   |