

T igual macho / macho cónico, hembra lateral - A32



Rosca macho BSPT

R 1/8

Rosca hembra BSPP

G 1/8

Presión de uso


0 a 15 bar

Material

Latón y latón niquelado

Descripción

Referencia	Rosca macho BSPT	Rosca hembra BSPP
A32 1818	R 1/8	G 1/8
A32 1414	R 1/4	G 1/4
A32 3838	R 3/8	G 3/8
A32 1212	R 1/2	G 1/2
A32 3434	R 3/4	G 3/4

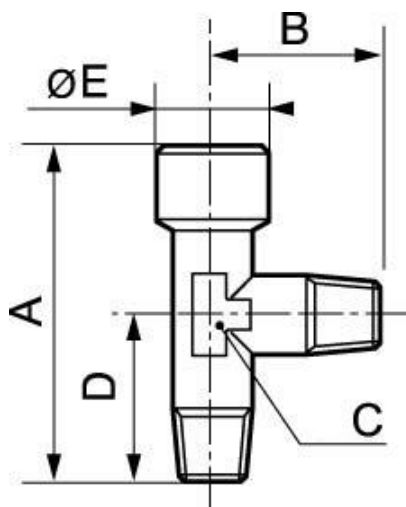

Dimensions

Referencia	A mm	B mm	C mm	D mm	E mm
A32 1818	39.5	18.5	10	21	13
A32 1414	49	23.5	13	25.5	17
A32 3838	54	26	17	28	21
A32 1212	64.5	31	21	33.5	26.5
A32 3434	69.5	33	25	36.5	32