

Bloque de derivación hembra - A16



Entrada rosca hembra

BSPP

2 x G 3/8

Salida rosca hembra

BSPP

2 x G 1/4

Presión de uso


0 a 15 bar

Material

Latón y latón niquelado

Descripción

Referencia	Entrada rosca hembra BSPP	Salida rosca hembra BSPP
A16 3814S2	2 x G 3/8	2 x G 1/4
A16 3814S3	2 x G 3/8	3 x G 1/4
A16 3814S4	2 x G 3/8	4 x G 1/4
A16 3814S5	2 x G 3/8	5 x G 1/4
A16 3814S6	2 x G 3/8	6 x G 1/4

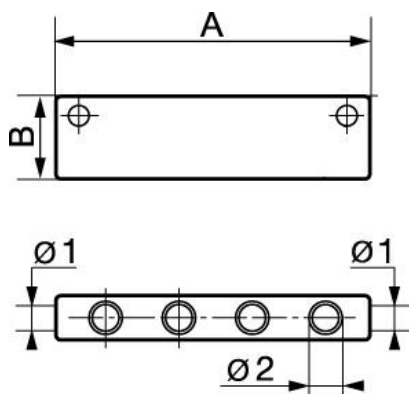

Dimensions		
Referencia	A mm	B mm
A16 3814S2	72	30
A16 3814S3	108	30
A16 3814S4	144	30
A16 3814S5	180	30
A16 3814S6	216	30