

Micro válvula - Rosca macho cilíndrica - RPS DG



Rosca macho BSPP

G 1/8

Presión de uso

0 a 10 bar

Temperatura


0°C a + 60°C

Material

Polímero y latón niquelado

Descripción

Referencia	Rosca macho BSPP
RPS DG0000	G 1/8
RPS DG0100	G 1/8
RPS DG0101	G 1/4
RPS DG0201	G 1/4
RPS DG0202	G 3/8
RPS DG0302	G 3/8
RPS DG0303	G 1/2

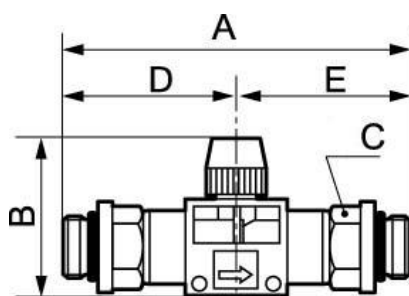

Dimensions

Referencia	A mm	B mm	C mm	D mm	E mm
RPS DG0000	65	40.3	14	32.5	32.5
RPS DG0100	66.5	40.3	14	34	32.5
RPS DG0101	68	40.3	14	34	34
RPS DG0201	81.5	44.5	17	42	39.5
RPS DG0202	84	44.5	17	42	42
RPS DG0302	86	44.5	21	44	42
RPS DG0303	88	44.5	21	44	44