

## T macho cónico lateral orientable - RMT AR



### Rosca macho BSPT

R 1/8

### Para tubo Ø ext. (mm)

4

### Presión de uso

0 a 15 bar

### Temperatura

-20°C a +80°C


### Material

Latón niquelado

## Descripción

Referencia	Rosca macho BSPT	Para tubo Ø ext. (mm)
<b>RMT AR0400</b>	R 1/8	4
<b>RMT AR0600</b>	R 1/8	6
<b>RMT AR0601</b>	R 1/4	6
<b>RMT AR0800</b>	R 1/8	8
<b>RMT AR0801</b>	R 1/4	8
<b>RMT AR1001</b>	R 1/4	10

Referencia	Rosca macho BSPT	Para tubo Ø ext. (mm)
<b>RMT AR1002</b>	R 3/8	10
<b>RMT AR1202</b>	R 3/8	12
<b>RMT AR1203</b>	R 1/2	12

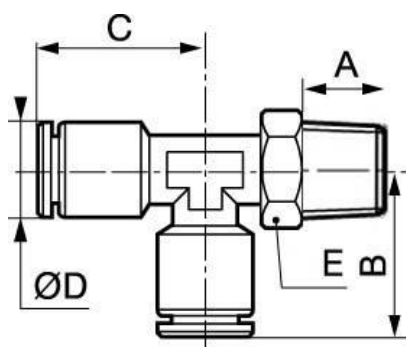

### Dimensions

Referencia	A mm	B mm	C mm	D mm	E mm
RMT AR0400	8	23	22	10	12
RMT AR0600	8	24	24	11.6	12
RMT AR0601	11	25	26	11.6	16
RMT AR0800	8	27.5	27.5	14.5	12
RMT AR0801	11	30	26	14	16
RMT AR1001	11	30.5	30.5	15.6	16
RMT AR1002	11	30.5	30.5	15.6	19
RMT AR1202	12	35	32	19	19
RMT AR1203	14	34.5	34.5	19	22